



# IND. RACK 72 x 24 W/ 3-WIRE DECKS/BLACK WRINKLE

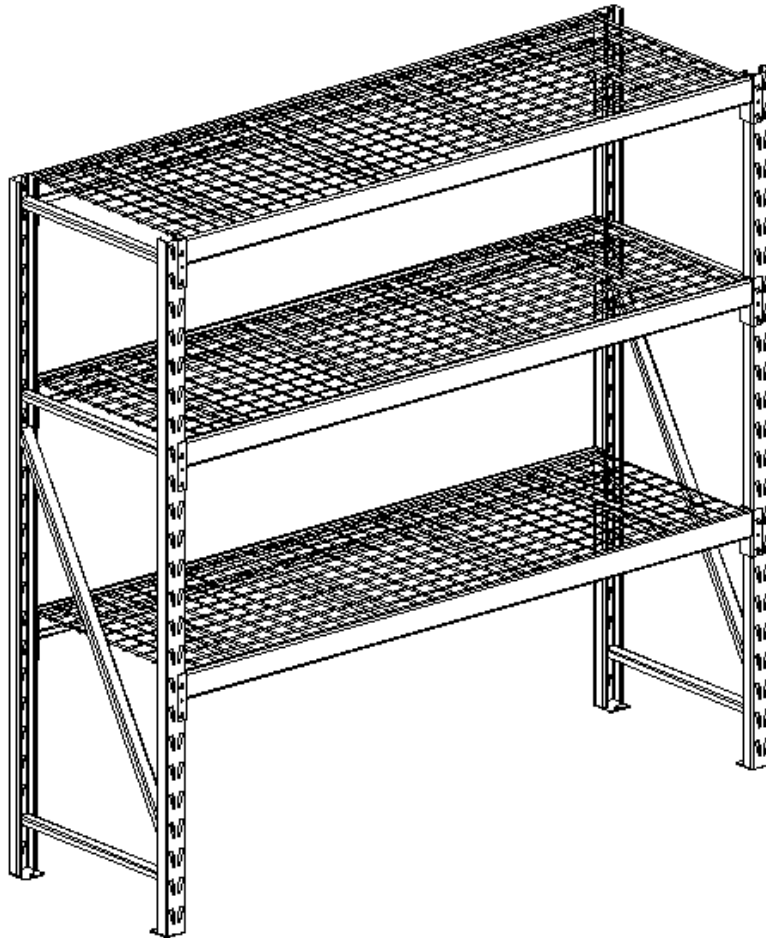


**"ADULT ASSEMBLY REQUIRED DUE TO THE PRESENCE OF SMALL PARTS, SHARP POINTS, SHARP EDGES AS RECEIVED"**

## Parts List


Please read completely through the instructions and verify that all parts listed are present before beginning assembly.

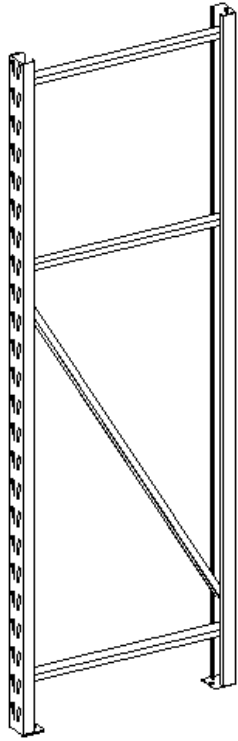


**A- Upright Frame (2- ea.)**

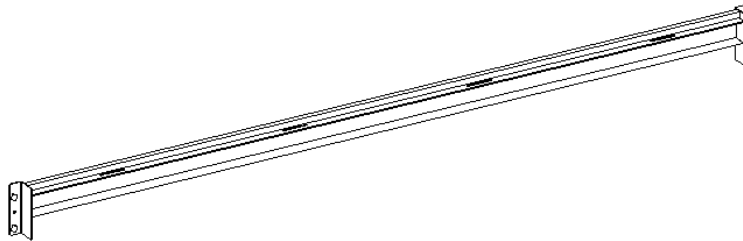

**B- Cross Beam (6- ea.)**

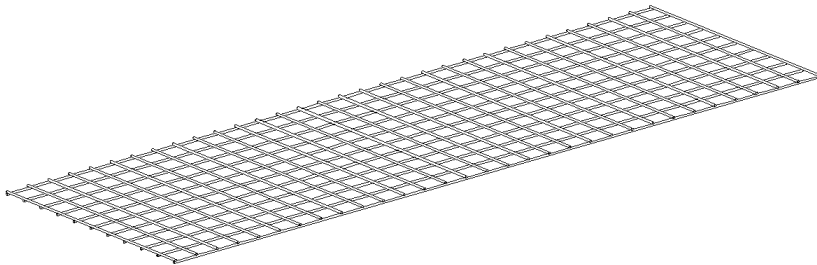

**C- Wire Deck (3- ea.)**

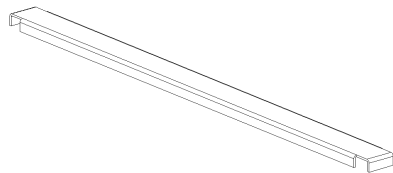

**D- Channel (12-ea.)**

**Tool Required: Rubber Mallet.**

## Assembly Instructions


**Note:** Make sure all the clips lock in place securely before using the unit, if you have any defective parts please do not use, improper installation may result in damage or injuries.

1. Unpack the unit and lay parts out on floor.
2. Pick up one Cross Beam (B) and attach to the Column of Upright Frame (A) by inserting the two clips on the bracket of Cross Beam into the bottom two keyholes of the Column. You need to insert the clips starting from the outside and then tap down with rubber mallet to seat the beam into the column in place. See detail #1.

**Note:** Make sure the 3/4" narrow flange goes on top and don't hit too hard so you will not damage or bend the beams.

3. Now attach the other Upright Frame (A) at the other end of the Cross Beam, make sure the clips are at the same level. **Ask the assistance of your friends.** As shown in detail #1.
4. Repeat last two steps to attach the other Cross Beam (B) to the opposite two Columns. Make sure the two Cross Beams are at the same level.


**Detail #1**

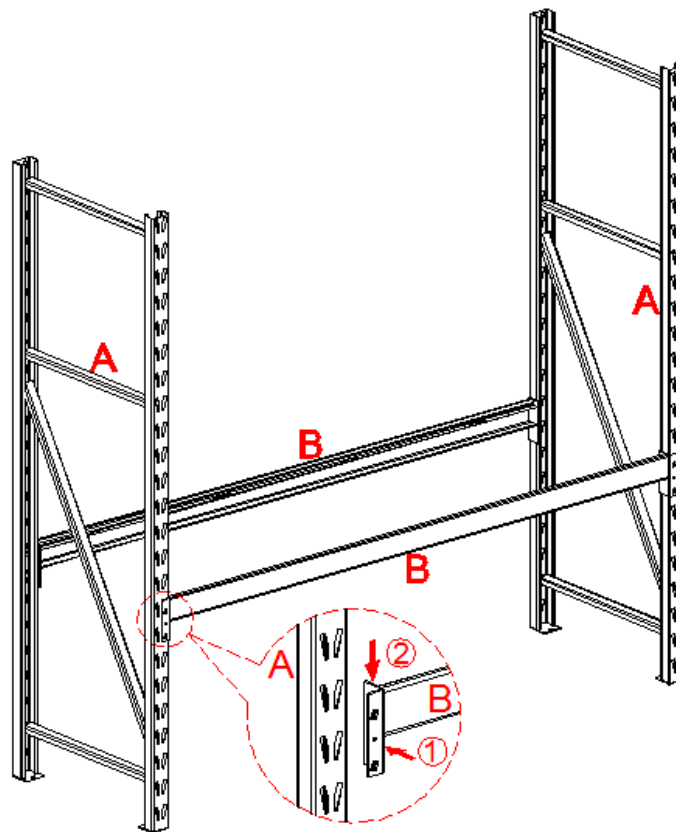

## Assembly Instructions


- Repeat steps 2 through 4 to attach next set of Cross Beams (B) at the same level to form the second shelf level, as shown in detail #2.

**Note:** The columns are adjustable in 3" increment. You can adjust the wire deck shelves at your desired height.

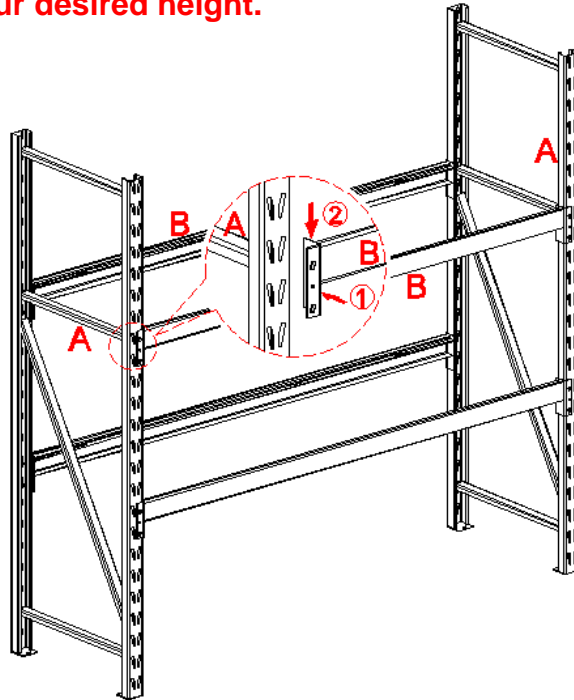

**Detail #2**

- To complete the frame assembly, repeat steps 2 through 4 to attach the last two Cross Beams (B) on the top two keyholes of Columns. as shown in detail #3.

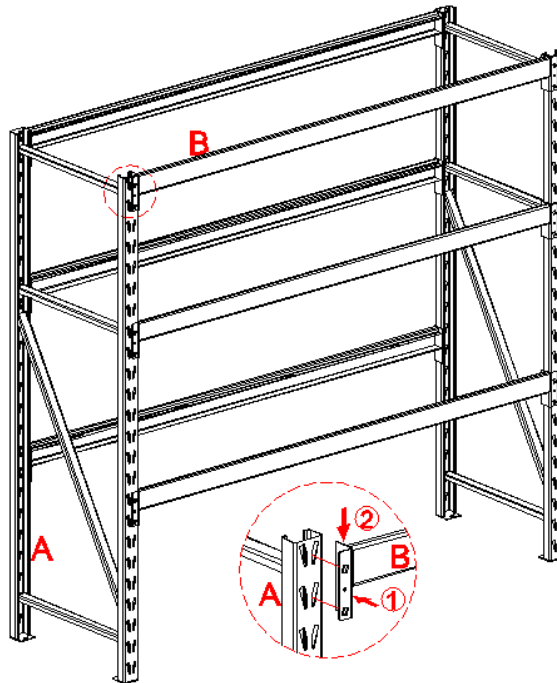



**Detail #3**

## Assembly Instructions

7. Pick up one Channel (D) and fix it to the assembled unit as shown in detail #4.

Repeat steps to install the rest of channels to the rack. Make sure all of the channels are seated completely.

### Detail #4

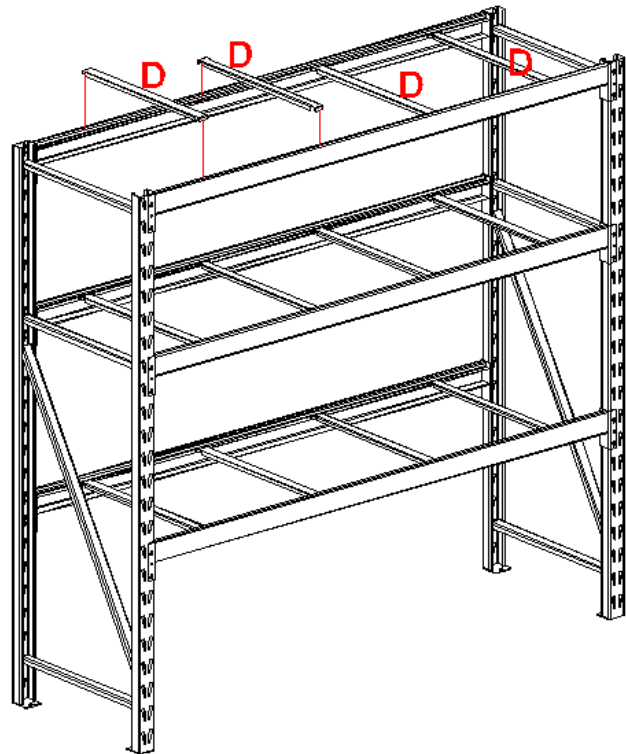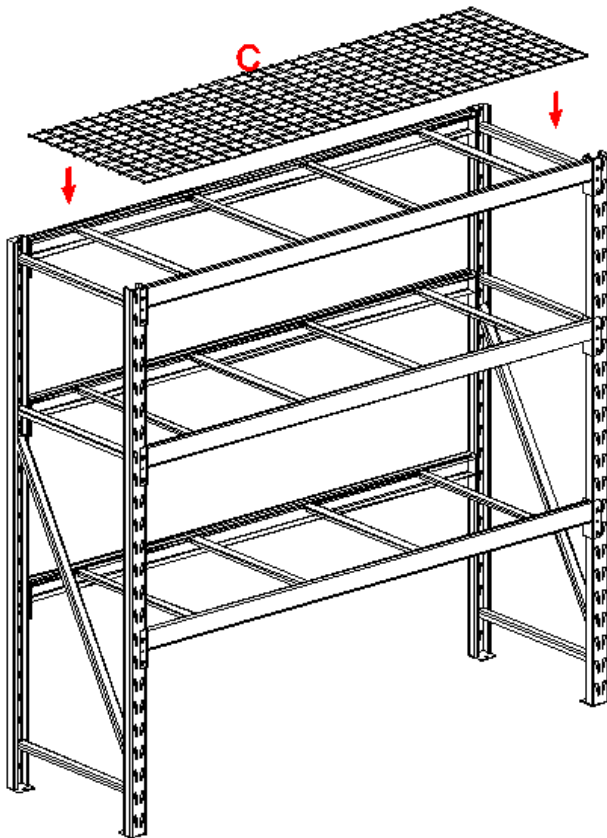

8. Drop the Wire Decks (C) between the lower flange of two Cross Beams (B) properly. Make sure the bottom support rails of the wire decks go all the way into the slots of Cross Beams. As shown in detail #5.

### Detail #5

9. Periodically inspect the unit to ensure beams are seated properly and brackets are firmly connected to the Columns.

## Assembly Instructions

**If you have got more than one unit, you can transform your shelving system into a custom workspace.**

10. Position two Racks in line with the desired space between them. Leave enough space to fit the Cross Beams (B). Now repeat steps 2 through 4 to attach two set of Cross Beams (B) at your desired height between the adjoined Upright Frames (A). Make sure they are at the same level.
11. Drop the Wire Decks (C) in place.

